

Strom Plumbing




Ph: (916) 638-2722 / Fax: (916) 638-2725

Installation Information

Tub & Shower Set (3 valve)

Warranted only if installed by a qualified licensed plumber. Use Teflon tape on all threaded connections.

1. The maximum wall thickness is 1 ½”.
2. Rough in the valves from the back of a finished wall, assuring there is a proper distance for the escutcheons and handles to go on the valve stems.
3. The spread between the Hot and Cold valves is **9”on center** with supplied nipples connected to diverter.
4. Connect the Hot & Cold valves to ½” iron pipe size water supply, where the union and large nut are pointed down.

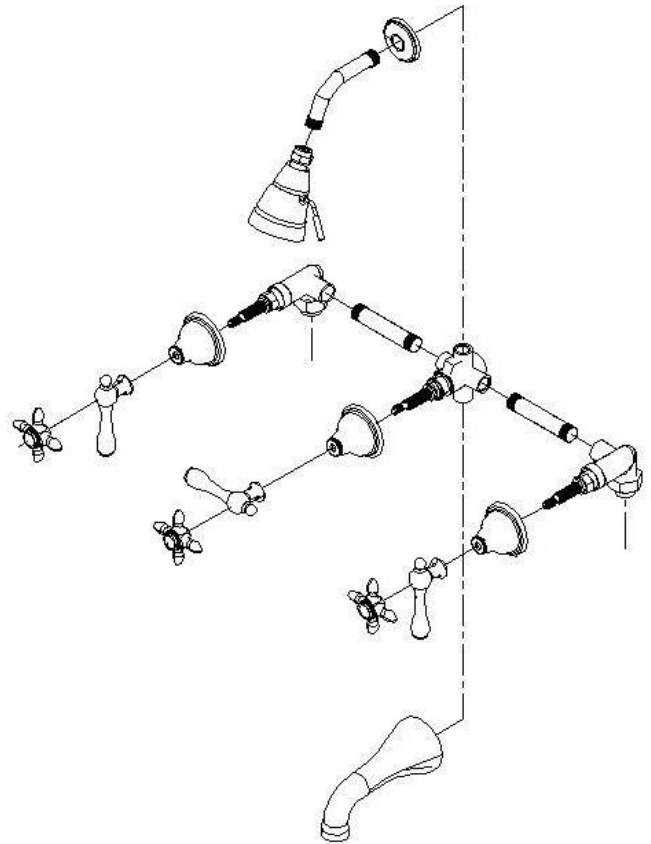

3 Valve Tub & Shower Sets	Centers	Escutcheon Diameter	Escutcheon Height	Handle Length
P0160	9"	2 7/8"	1 7/8"	3 1/4"
P0177	9"	2 1/4"	1 1/2"	3 1/2"
P0317	9"	2 7/8"	1 3/4"	3 1/2"
P0352	9"	2 3/4"	2"	3 1/4"
P0360	9"	2 7/8"	1 3/4"	3 1/4"
P0381	9"	2 1/2"	1 3/4"	3 1/4"
P0589	9"	2 1/2"	1 3/4"	3"
P0806	9"	2 7/8"	1 7/8"	2 1/16"
P0844	9"	2 1/4"	1 1/2"	3 1/4"